


'Hippo' Road Barrier

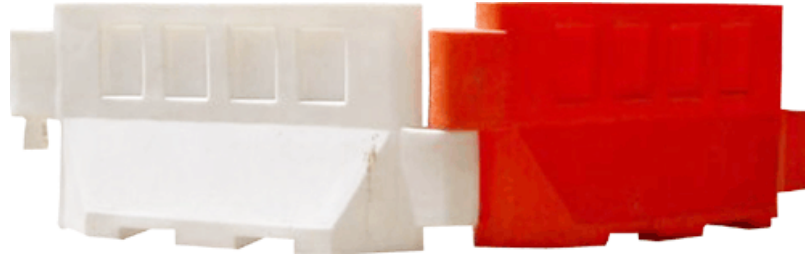

Physical Properties:

- * Water or Sand filled Road Barrier
- * High UV and chemical stabilization
- * Easily transportable when empty
- * Hinged joint can be turned up to 90°
- * Good shock absorption qualities
- * All parts are reusable and 100% recyclable
- * Adjustable weight to match any specification
- * Will not deform in extreme hot or cold climates
- * Heavy, when filled with water or sand for extra stability
- * Unique easy interlocking system
- * Safe, Effective, and durable
- * Can Comply with EN1317- 2:1998 T1&T2

Installation:

- * Simple to install
- * Easy fill ports and drain ports (7cm on 2m and 4cm on 1 m)
- * Easy to stack, store and transport
- * Rapid deployment- two people can set up 65m in under 30min
- * Eliminates crane and boom truck for installation
- * Forklift access for quick and easy unloading and loading

Costing:

- * Lower transportation cost
- * No maintenance cost
- * Lower per meter cost than cement barriers due to product versatility and speed of installation

Extra Options:

- * LED lamps can be installed on to barriers
- * Will accept 'Display Banners' for advertising
- * Other colours available on request
- * Signage can be installed on to barriers
- * Available in red and white
- * Reflective tape available on request

Applications:

- * **Positive Traffic Channelization:**
2m variety recommended for Motorway
1m variety recommended for inside Cities
- * **Crowd control**
- * **Airports**
- * **Bomb protection**
- * **Parking**
- * **Security checkpoints**
- * **Emergency signage**
- * **Seaport**
- * **Military**
- * **Road Closures**
- * **Construction Site**

Dimensions:

| Type | Length | Height | Base Width | Mass when Empty | Mass when Filled with Water | Recommended use | Packing Specifications |
|------|--------|--------|------------|-----------------|-----------------------------|-----------------|--|
| 2m | 1.9m | 0.9m | 0.5m | 35 Kg | 400 Kg | Motorway | 20 ft Container- 36 Barriers 40 ft Container- 72 Barriers |
| 1m | 1.2m | 0.65m | 0.45m | 15 kg | 108 kg | City | 20 ft Container- 120 Barriers 40 ft Container- 240 Barriers |

(All technical values are with +/- 3% tolerance)

The listed technical values are guiding values, achieved in our laboratories and/or independent testing institutes. Our products are subject to changes without prior notice